

# 5' Smooth Roll

## FOR PERFECT PLAY

Gives Bowling Greens and Tennis Courts the IRONED look.

### USED WORLD WIDE

The **SMOOTH ROLL** system has been engineered to give the ultimate finish. The delicate balance of the Three Roller System combined with *Smooth Roll's* unique patented transmission delivers a more positive result. *Smooth Roll* has been assisting green keepers to achieve the desired green speeds for over a decade.

Many discerning green keepers have claimed that *Smooth Roll* has the correct combination that keeps it ahead of other rollers in the market place, on all species of natural turf.

**SMOOTH ROLL** transportation trolley picks up *Smooth Roll* in a side action. This allows *Smooth Roll* to be transported through narrow paths and doorways with minimal fuss. No clips or bolts are needed. Just roll the transporter under the lifting lugs, push down and *Smooth Roll* is off the ground and ready to be transported to the green or storage area.



**SMOOTH ROLL**  
**CAN MANOEUVER THROUGH NARROW AREAS**  
**TRANSPORT TROLLEY IS STANDARD**  
**EQUIPMENT**




**SMOOTH ROLL IN ACTION**

**SMOOTH ROLL** glides over the green, thus applying a polished finish to all surfaces. It irons out all lumps and bumps, footprints etc, and leaves a smooth flat surface in minutes. In most cases mower settings do not have to be low to achieve the required green speed. *Smooth Roll* saves you time and money.



**SMOOTH ROLL'S** unique mathematical formula has been calculated to apply the ultimate P.S.I. The 3 rollers combined with weight and speed; deliver a fast smooth finish to all surfaces. Combine this with the patented Drive System and 'side to side' Z pattern steering and you will soon see why Smooth Roll has been No. 1 for many years.

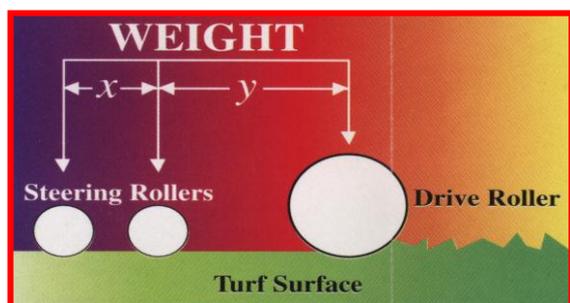

**SMOOTH ROLL'S UNIQUE MATHEMATICAL COMBINATION OF:**

- ❖ **ROLLER SPACING**
- ❖ **ROLLER DIAMETERS**
- ❖ **ROLLER LENGTH**
- ❖ **TOTAL OVERALL WEIGHT**

SMOOTH ROLL has many features that make it simple and easy to operate. Feather-touch foot operated directional controls make



*Smooth Roll* simple and safe. Alternative pedals are used for braking. Simple steering control enable a Z-Pattern movement producing a double roll every time.



**SPECIFICATIONS - SRH-5**

ENGINE	Honda 5.5HP (GX160) with oil cut off switch
TRANSMISSION	Fully adjustable integrated system
NUMBER OF ROLLERS	2 steering, 1 drive
MACHINE SWATH	1600mm (63")
ROLLER DIAMETERS	Steering: 73mm (2 7/8"). Drive: 114mm (4 1/2")
OVERALL DIMENSIONS (machine only)	Width: 640mm (25 1/8"). Length: 1800mm (70 7/8") Length: 1800mm (70 7/8")
WEIGHT	220kg (484 lb) Evenly Balanced
OVERALL DIMENSIONS (with transporter)	Width: 950mm (37 1/2") Length: 200mm (78 3/4") Height 1640mm (64 1/2")
CONSTRUCTION	All steel
SEAT	Adjustable all weather vinyl
BEARINGS	All weather rubber sealed
FINISH	Powder coated epoxy
CONTROL	Steering: Side action "Z" pattern. Side movement: Foot Pedal. Breaking: Alternative foot pedal. Speed: Variable
TRANSPORTER	Side action self loading
RIM	8" x 6.50"
TYRE	16" x 6.50" x 8" 2 Ply flat profile
PULLEY'S	Idler: Steel. Drive: Cast Iron. Clutch: Cast Iron. 1 Vee Belt connects all pulley's
SEAT	Now updated (to allow water drainage)